




AIR 102 II 600 WH

Cod. 02013179

EAN 8422248109895

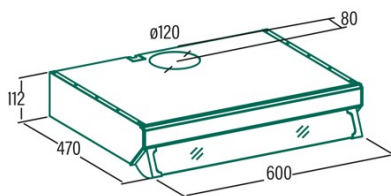

GENERAL INFORMATION

EAN/UPC	8422248109895
Subfamily	Conventional

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	60
EEL class (energy efficiency class)	D
FDE (fluid dynamic efficiency)	8,8
FDE class (fluid dynamic efficiency class)	E
LE (light efficiency) (lux/W)	13,1
LE class (light efficiency class)	D
GFE (grease filtering efficiency)	68
GFE class (grease filtering efficiency class)	D
Airflow in normal mode MIN (m ³ /h)	195
Airflow in normal mode MAX (m ³ /h)	320
Acoustic power in normal mode MIN (dB)	60
Acoustic power in normal mode MAX (dB)	67
Po (energy consumption in off mode) (W)	0
Ps (energy consumption in standby mode) (W)	0

Integration directive EU 66/2014

f (time increase factor)	1,7
EEL (Energy Efficiency Index)	88,8
QBEP (maximum efficiency at air flow point) (m ³ /h)	191,2
PBEP (maximum efficiency at pressure point) (Pa)	136,9
WBEP (power consumption at maximum efficiency) (W)	83
WL (nominal power lighting system) (W)	11
EMIDDLE (Average illuminance on the cooking surface) (lux)	144

External Dimensions

Diamètre de sortie (mm)	120
-------------------------	-----

Characteristics

Motor quantity	2
Motor model	L1
Maximum pressure (Pa)	221
Filter technology	Aluminium mesh
Control technology	Mechanical slider
Booster	-
Power levels	3
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	No
Remote control	-
Display	-

Lighting

Light model	LED E-14
Ray technology	LED

Installation

Recirculation option	√
Charcoal filter	-
Back draught shutter	No
Inner shield	-

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	111
Electric shock protection	Class I
Power cord length (m)	0,7
Plug type	No plug

Accessories

Back draught shutter	02849002
----------------------	----------

