




AIR 102 600 BLANCA

Cod. 02013279

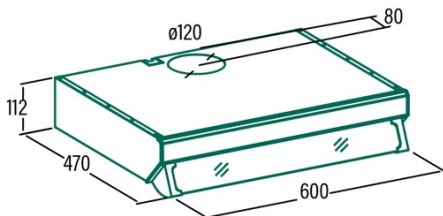

GENERAL INFORMATION

Subfamily	Conventional
-----------	--------------

Product sheet according to directives EU65/2014 - EN61591, EN60704-2-13, EN50564

AEC (Annual energy consumption) (kWh/year)	69,6
EEL class (energy efficiency class)	D
FDE (fluid dynamic efficiency)	5,1
FDE class (fluid dynamic efficiency class)	F
LE (light efficiency) (lux/W)	8,4
LE class (light efficiency class)	E
GFE (grease filtering efficiency)	68
GFE class (grease filtering efficiency class)	D
Airflow in normal mode MIN (m3/h)	95
Airflow in normal mode MAX (m3/h)	310
Acoustic power in normal mode MIN (dB)	59
Acoustic power in normal mode MAX (dB)	65
Po (energy consumption in off mode) (W)	0
Ps (energy consumption in standby mode) (W)	0

Integration directive EU 66/2014

f (time increase factor)	1,8
EEL (Energy Efficiency Index)	96,1
QBEP (maximum efficiency at air flow point) (m3/h)	150,1
PBEP (maximum efficiency at pressure point) (Pa)	113
WBEP (power consumption at maximum efficiency) (W)	92,8
WL (nominal power lighting system) (W)	11
EMIDDLE (Average illuminance on the cooking surface) (lux)	92,5

External Dimensions

Width (mm)	600
Depth (mm)	173
Maximum total height (mm)	112
Minimum total height (mm)	550
Diamètre de sortie (mm)	120

Characteristics

Motor quantity	2
Motor model	L1
Maximum pressure (Pa)	190
Control technology	Mechanical slider
Booster	-
Power levels	3
Timer	-
Filter saturation indicator	-
Charcoal filter replacement indicator	-
Dimmer function	-
Connectivity	No
Remote control	-
Display	-

Lighting

Light model	LED E-14
Ray technology	LED

Installation

Minimum distance to gas plate (mm)	650
Recirculation option	-
Charcoal filter	-
Back draught shutter	No
Inner shield	-

Electric connection

Nominal voltage (V)	220-240
Nominal frequency (Hz)	50
Nominal input power (W)	111
Electric shock protection	Class I
Plug type	No plug

